


**NOTES:**

- 100% TESTING FOR OPENS, SHORTS CONTINUITY, MAX RESISTANCE OF  $1\Omega$
- COIL CABLE WITH A 10" O.D. AND TIE WITH A BEADED CABLE TIE

INDEX	QUANTITY	INDEX	DESCRIPTION	QUANTITY
W1	132 (IN)	1		1
W2	125 (IN)	2		1
W3	264 (IN)	3		1
W4	264 (IN)	4		1
W5	19 (IN)	5		2
W6	263 (IN)	6		2
W7	144 (IN)	7		2
W8	144 (IN)	8		1
W9	295 (IN)	9		1
W10	122 (IN)	10		2
W11	284 (IN)	11		1
W12	138 (IN)	12		1
W13	122 (IN)	13		1
W14	145 (IN)	14		1
W15	122 (IN)	15		1
W16	428 (IN)	16		1
		17		1
		18		1
		19		0.001
		20		1
		21		1
		22		1
		23		1
		24		0.068
		25		0.036
		26		16
		27		3
		28		2
		29		1
		30		2
		31		4
		32		7
		33		4
		34		2 (IN)
		35		8 (IN)
		36		7 (IN)
		37		2 (IN)
		38		45 (IN)
		39		22 (IN)
		40		35 (IN)
		41		118 (IN)
		42		21 (IN)

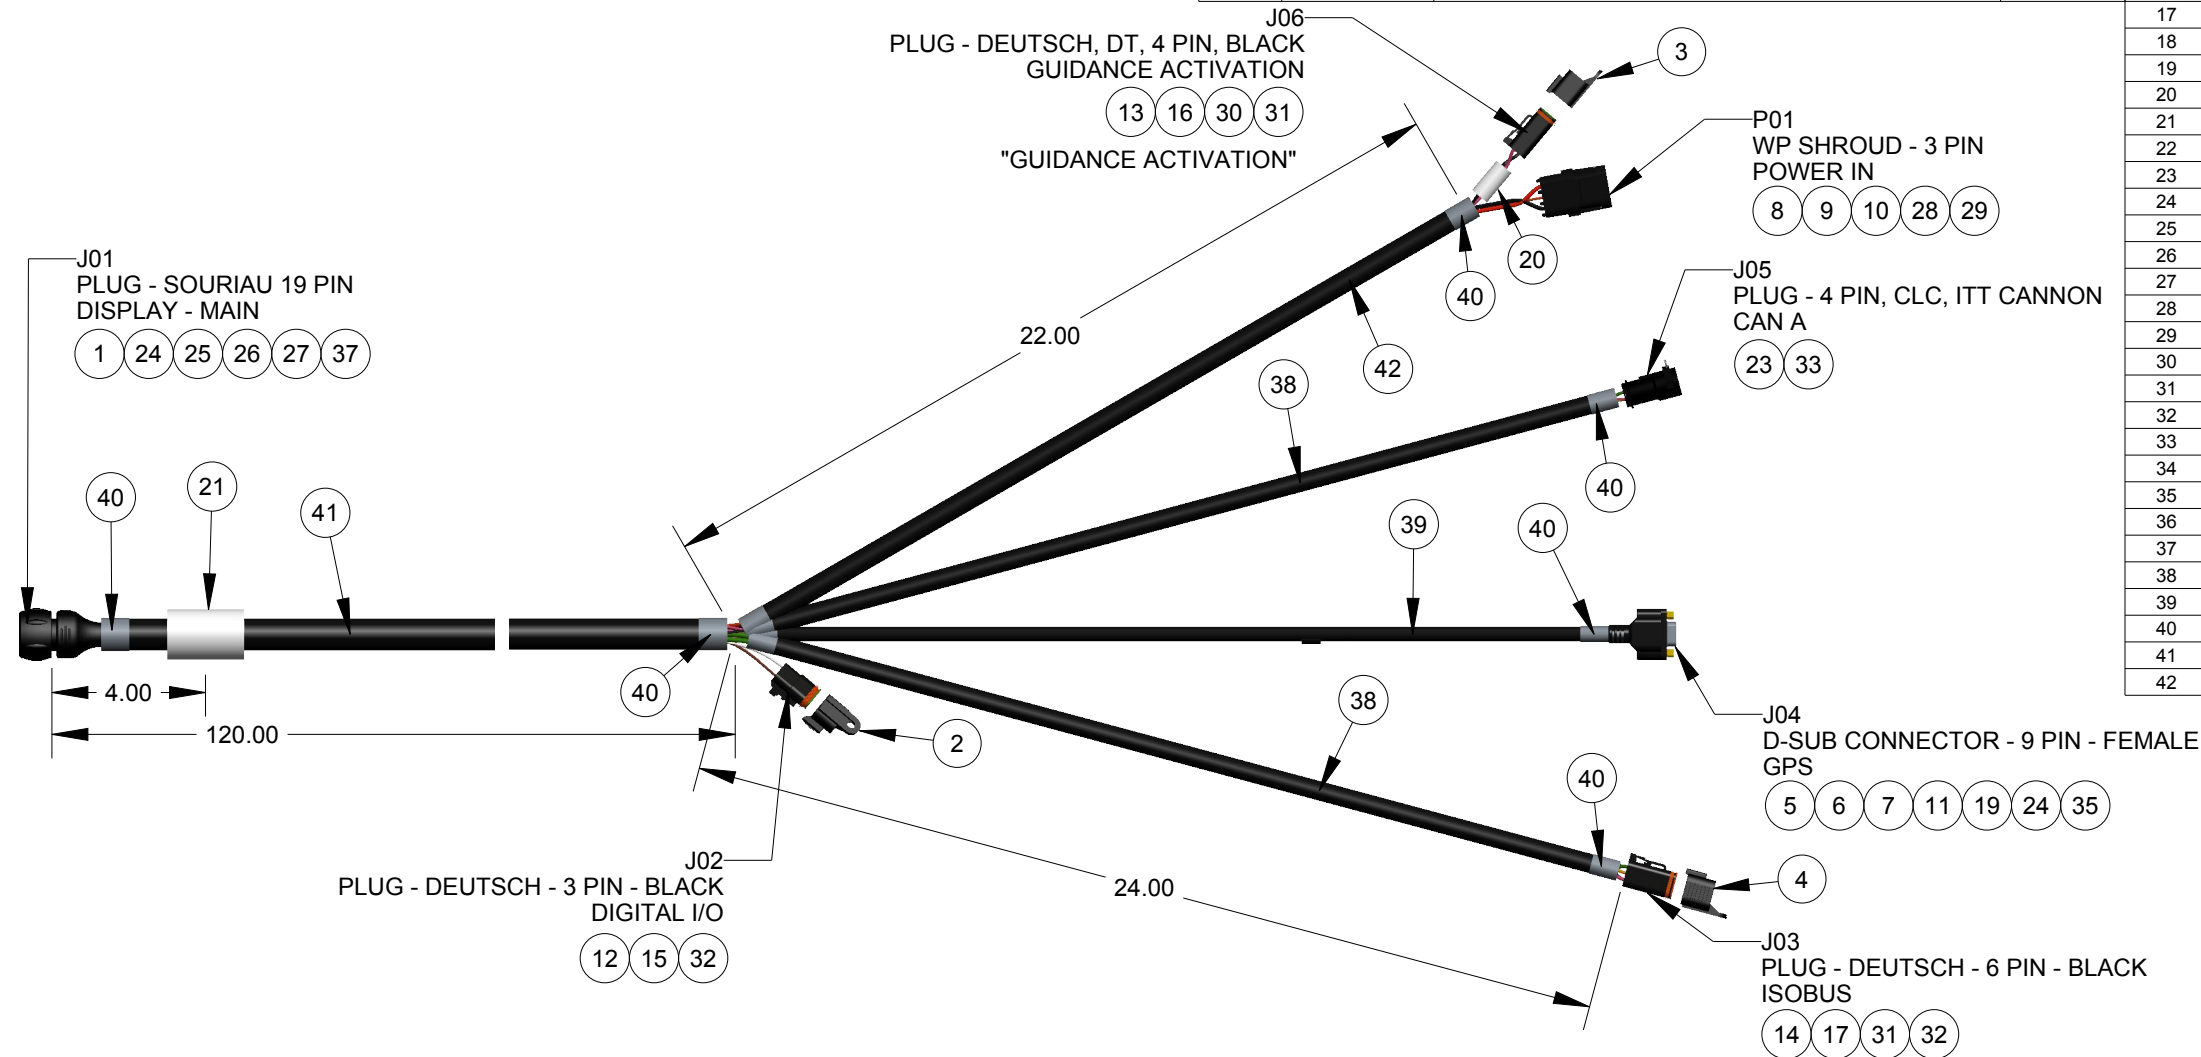

REV	DESCRIPTION	BY	DATE	CHK
C	REMOVED FUSES F01 AND F02, ADDED GUIDANCE ACTIVATION J06	LJL	8-4-15	JAB
A	REDSIGN POWER/GROUND CIRCUITS, CHANGE 4000623 TO 4004510, ADD FUSES, MOVE J02	JAB	4-22-15	TRC
A	NEW DRAWING	JAB	8-7-14	TRC
LTR	CHANGES			

THE INFORMATION HEREON IS PROPRIETARY PROPERTY OF AG LEADER TECHNOLOGY, INC. THIS DOCUMENT IS A CONFIDENTIAL DISCLOSURE. ANY USE, EXCEPT THAT FOR WHICH IT IS LOANED, IS PROHIBITED.

DIMS SHOWN ARE WIRE LENGTHS UNLESS OTHERWISE NOTED  
 $\pm 0.125"$  TOLERANCE ON JACKET STRIP DIMS  
 $\pm 0.031"$  TOLERANCE ON WIRE STRIP LENGTHS  
 LENGTH TOLERANCES ARE NON-STACKABLE

OVERALL LENGTH	LENGTH TOLERANCE
00.00" - 11.99"	$\pm 0.25"$
12.00" - 59.99"	$\pm 0.50"$
60.00" - 119.99"	$\pm 1.00"$
120.00" & UP	$\pm 2.00"$

LABEL POSITION DIMS ARE  $\pm 2.00"$  UNLESS OTHERWISE NOTED

COMPLIANCE: **ROHS**

SCALE: **0.200**      FORMAT SIZE: **B**

**Ag Leader<sup>®</sup> Technology**

2202 SOUTH RIVERSIDE DR. AMES, IA 50010

MATERIAL:

SEE NOTES

FINISH:

NONE

PART NOUN - DESCRIPTION:

**CABLE DISPLAY MAIN - FULL**


PART NO: **4004269-12**      REV: **C**

UNITS: **INCHES**


SHEET **1 OF 3**



**SP4, SP5: CAN A TERMINATOR**

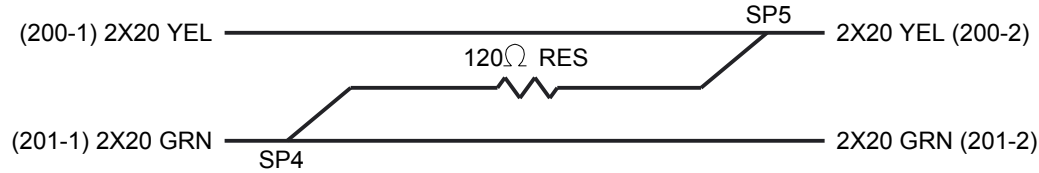

**SP2: POWER OUT**

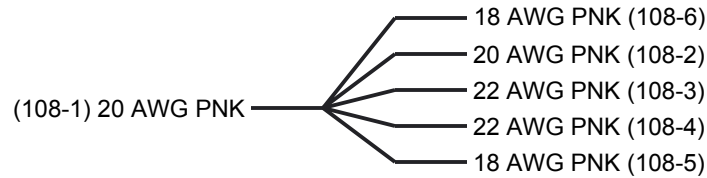

**SP6: ISOBUS CAN LOW**




**SP7: ISOBUS CAN HIGH**



**SP1: POWER IN**



**SP3: GROUND**

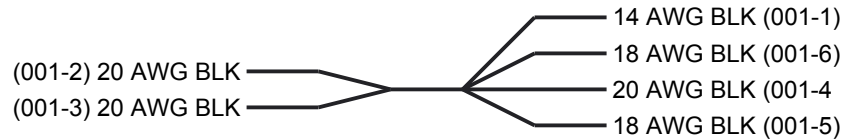

**SP9: SERIAL GROUND**



C	REMOVED FUSES F01 AND F02, ADDED GUIDANCE ACTIVATION J06		LJL	8-4-15	JAB				
A	REDSIGN POWER/GROUND CIRCUITS, CHANGE 4000623 TO 4004510, ADD FUSES, MOVE J02		JAB	4-22-15	TRC				
A	NEW DRAWING		JAB	8-7-14	TRC				
REV			BY	DATE	CHK				
LTR	CHANGES								

THE INFORMATION HEREON IS PROPRIETARY PROPERTY OF AG LEADER TECHNOLOGY, INC. THIS DOCUMENT IS A CONFIDENTIAL DISCLOSURE. ANY USE, EXCEPT THAT FOR WHICH IT IS LOANED, IS PROHIBITED.

DIMS SHOWN ARE WIRE LENGTHS UNLESS OTHERWISE NOTED  
 ±0.125" TOLERANCE ON JACKET STRIP DIMS  
 ±0.031" TOLERANCE ON WIRE STRIP LENGTHS  
 LENGTH TOLERANCES ARE NON-STACKABLE  

OVERALL LENGTH	LENGTH TOLERANCE
00.00" - 11.99"	±0.25"
12.00" - 59.99"	±0.50"
60.00" - 119.99"	±1.00"
120.00" & UP	±2.00"

 LABEL POSITION DIMS ARE ±2.00" UNLESS OTHERWISE NOTED



2202 SOUTH RIVERSIDE DR. AMES, IA 50010

MATERIAL:

SEE NOTES

FINISH:

NONE

PART NOUN - DESCRIPTION:

**CABLE DISPLAY MAIN - FULL**

COMPLIANCE:  
**ROHS**

UNITS:  
**INCHES**

SCALE  
**0.150**

FORMAT SIZE  
**B**

SHEET  
**2 OF 3**

PART NO: **4004269-12** REV: **C**

